

SERIAL NUMBER

dynaco

SCA-50 AMPLIFIER

This number must be mentioned in all communications concerning this equipment.

INSTRUCTIONS FOR ASSEMBLY OPERATION



929053-1

dynaco inc.

COLES ROAD & CAMDEN AVENUE / POST OFFICE BOX 88
BLACKWOOD, N. J. 08012, U.S.A.

CONTENTS

Specifications	2	Voltages	20
Introduction	3	In Case of Difficulty	21
Operating Instructions	3	Circuit Board Layouts	22
Installation Instructions	5	Service Policy and Limited Warranty	22
Assembly Instructions	6	240 Volts AC Line Connections	23
Back Panel Assembly	7	Parts List	24
Front Panel Assembly	9	Photo of Completed Unit	Insert
Main Chassis Assembly	11	Functional Block Diagram	Insert
Final Wiring	18	Circuit Description	Insert
Schematic Diagram	12 & 13	Pictorial Diagram	Insert
Component Values	14		

CAUTION: For continued protection, replace power fuse with the same type and rating as indicated.

WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.

SPECIFICATIONS

Rated Power Output:

25 watts continuous average power per channel into 8 ohms, 20-20,000 Hz, at less than 0.25% total harmonic distortion. Distortion decreases at lower power outputs.

Power at Clipping, Single Channel, 1000 Hz, less than 1% distortion:

35 watts @ 8 ohms; 35 watts @ 4 ohms; 20 watts @ 16 ohms.

Intermodulation Distortion:

Less than 0.1% at any power level up to 25 watts rms per channel into 8 ohms with any combination of test frequencies. Distortion decreases at lower outputs.

Frequency Response:

Phono: ± 1 dB of RIAA curve @ 1 watt into 8 ohms.
High Level: ± 0.5 dB, 15 Hz to 45 kHz @ 1 watt into 8 ohms.

Hum and Noise:

Phono: 72 dB below a 10 mv input (Ref: 1 kHz).
High Level: 89 dB below a 0.5 v input.

Input Sensitivity:

Phono: 1.65 mv for 25 watts output.
High Level: 125 mv for 25 watts output.

Phono Input Overload:

100 mv @ 1000 Hz.

Tone Controls:

± 10 dB @ 50 Hz; ± 10 dB @ 15 kHz

Impedances:

Magnetic Phono: 47,000 ohms.
High Level: 50,000 ohms.
Tape Output: From Phono inputs, 10,000 ohms minimum load.
From High Level inputs, same as source.
Headphone Output: 4 ohms or greater.

Separation:

60 dB @ 1000 Hz minimum; 40 dB @ 10,000 Hz.

Semiconductor Complement:

17 transistors, 2 integrated circuits, 2 FET's, 24 diodes.

Dimensions:

13½" wide x 12" deep x 4¼" high.


Shipping Weight:

15 lbs.

Power Consumption:

20 watts quiescent; 240 watts maximum; 50/60 Hz, 120 or 240 VAC.

TYPICAL PERFORMANCE CURVES

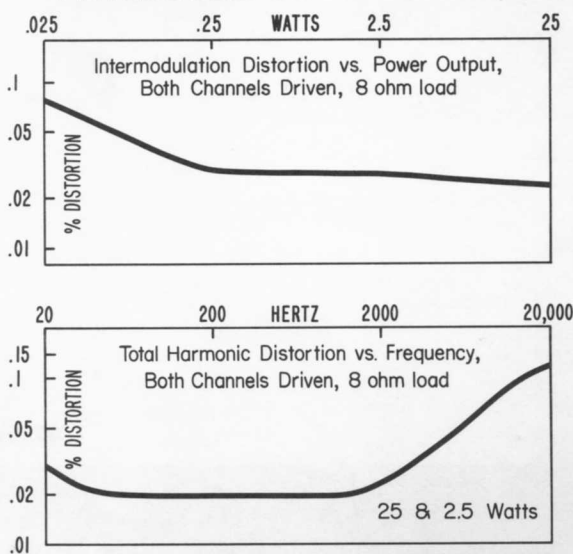

TONE CONTROL RANGE

